



## 1200° Mineral Fiber Pipe Insulation

### Product Description

Einsulation Rockwool Pipe Insulation is made of inorganic fibers split and hinged for easy snap-on assembly for industrial insulation and fire protection on piping in power and petrochemical plants.

### Benefits

- Excellent thermal performance
- Easy to handle and fabricate
- Low Dust
- Good compressive strength
- Non combustible
- Chemically inert
- Low water vapor absorption
- Cost Effective
- CFC and HCFC free

### Technical Characteristics

- Continuous use up to 1200°F
- Standard Sizes from ½" through 24" IPS
- Standard Length 1 meter (39 3/8")
- Standard Thicknesses from 1" through 4"
- 1/2" thickness increments
- No asbestos content
- Linear Shrinkage 0% at 1050°F
- Moisture sorption <1% after 24 hours
- Resistant to fungi
- Flame Spread 5; Smoke Developed 0
- Non combustible


### Relevant Specifications

- ASTM C547
- ASTM C302
- ASTM C335
- ASTM C356
- ASTM C1104
- ASTM E84
- ASTM E136



### Thermal Conductivity Chart

Mean Temp °F	"k" BTU in/ft <sup>2</sup> h°F
100	0.25
200	0.30
300	0.35
400	0.41
500	0.49
600	0.57

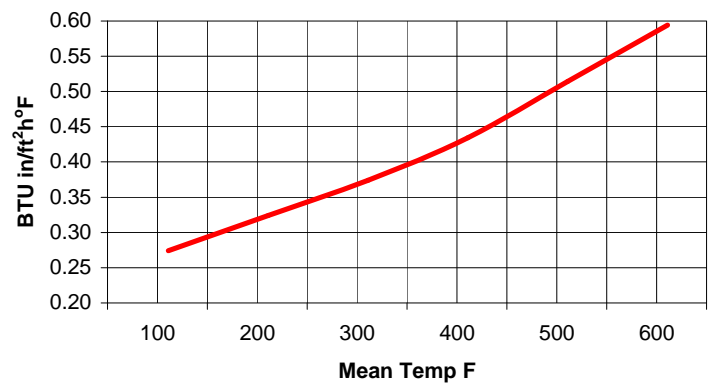

**Distributed By:**